


CHAIN LINK FENCE DETAIL
 NOT TO SCALE

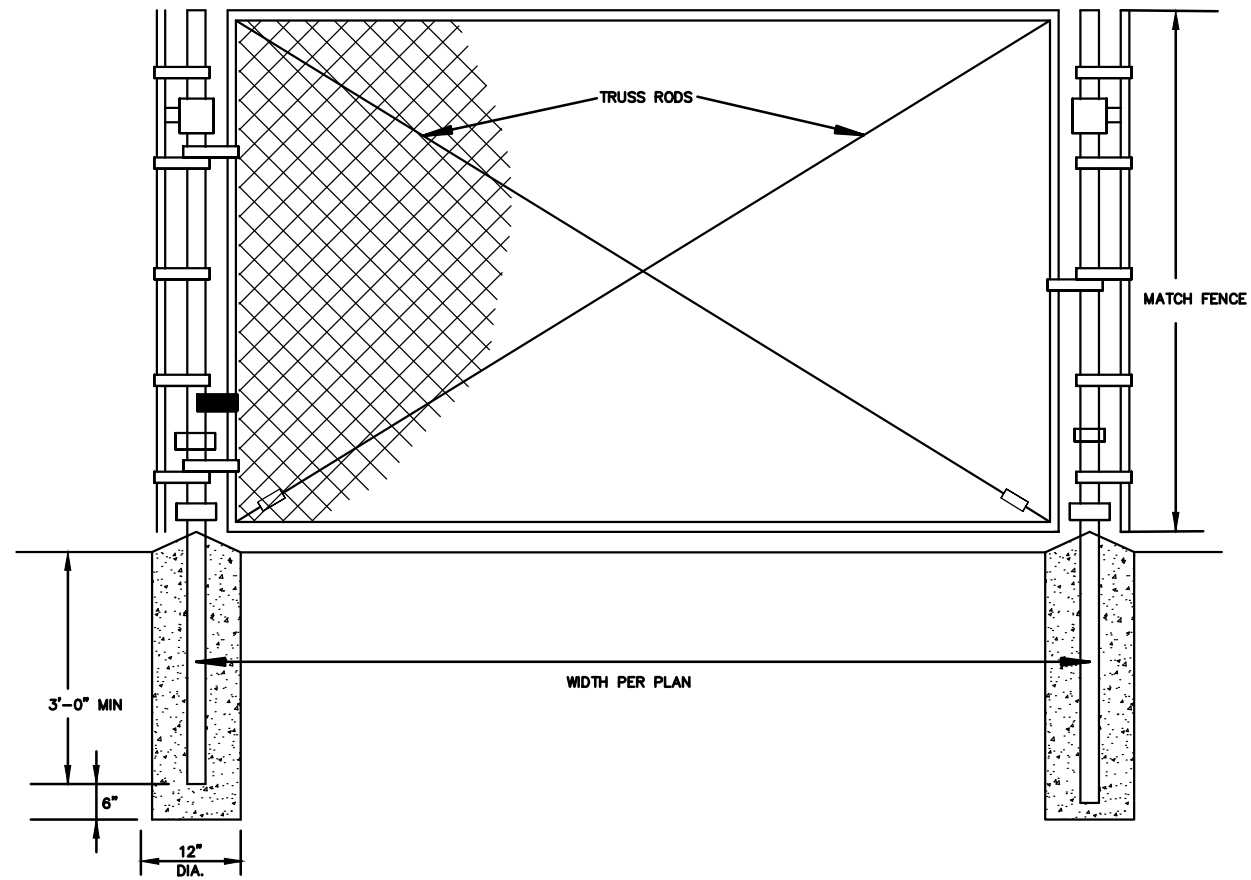

FENCE GATE DETAIL
 NOT TO SCALE

NOTES:

1. GATE FABRIC SHALL BE KNUCKLED ON TOP SELVAGES.
2. CONCRETE FOUNDATIONS AT GATES. SIZE RECOMMENDED BY GATE MANUFACTURER.
3. ALL FENCE, GATE POSTS & FRAMES TO BE GROUNDED.
4. ATTACH FENCE FABRIC TO LINE POSTS, TOP AND BOTTOM TENSION WIRES WITH TIE WIRES.
5. ALL TYPE V-1 & V-2 GATES SHALL ALLOW 180° OPENING SWING.
6. POSTS, RAILS AND RODS TO BE INSTALLED INSIDE OF FENCE FABRIC.
7. MATERIALS TO MEET REQUIREMENTS OF AASHTO M181.
8. FENCE TO BE PLACED AS CLOSE AS POSSIBLE TO CURB OR SIDEWALK AS SHOWN ON FENCE LAYOUT PLAN.
9. CONTRACTOR TO INCLUDE ADD ALTERNATE FOR 8' TALL FENCE AND GREEN WIND/DUST SCREEN.

REVISIONS	DESCRIPTION	DATE	MARK

**TOWNE SQUARE AT SUITLAND
 FEDERAL CENTER**
 SUITLAND, MD
 PRINCE GEORGE'S COUNTY

AMT FILE NO. 16-0341.001

DATE: 05-03-18

SCALE: